

SUBMITTAL DATA - OUTDOOR UN1IT

VRB192L4M-3G

VRB120L4M-3G + VRB072L4M-3G

VRF Heat Recovery

Job:	Engineer:			
Location:	Architect:			
Schedule No.:	Location:			
System Designation:	Date:			
Heat Recovery Outdoor Unit	For: Reference	Approval	Review	Construction

FEATURES

- Split coil heat exchanger
- · Dual hinged electrical boxes for ease of
- · High-efficiency vapor injection inverter compressor
- · Intelligent Duty Cycle operation
- · Night Silent operation
- · Hinged service doors
- · Built-in service console

- · Built-in base pan heater
- · Heating Operation down to -22F
- · Low Ambient Cooling down to -10F w/ kit

WARRANTY

- · Compressor 10-year limited warranty
- · All other components 10-year limited warranty *See warranty for details

SPECIFICATIONS		
PERFORMANCE		
Cooling Capacity ¹ (Btu/h)	Nominal	192,000
3 - 1 3 (- 7	Rated ²	184,000
EER	Ducted	11.0
	Non-Ducted	11.0
IEER	Ducted	20.1
	Non-Ducted	19.6
SCHE	Ducted	30.7
	Non-Ducted	32.5
Heating Capacity¹ (Btu/h)	Nominal	216,000
	Rated ²	206,000
COP47	Ducted	3.65
	Non-Ducted	3.92
COP17	Ducted	2.44
	Non-Ducted	2.59

ELECTRICAL DATA	
Power Supply (Volts/Phase/Hertz)	460/3/60
Minimum Circuit Ampacity (A)	43+27.5
Maximum Overcurrent Protection (A)	45+30
Compressor RLA (A)	17/17+19.4
Number of Compressors	2+2
Outdoor Fan Power Input (W)	1200/1200+750/850
Outdoor Fan FLA (A)	2.2/2.4+1.4/1.6

GENERAL DATA	
Connection Ratio	50% to 130%
Maximum Number of Indoor Units	35
Refrigerant Type	R-410A
Factory Refrigerant Charge (each unit)	23.8 lbs.

NOTES

- Cooling and Heating capacity data is rated at the following
 - Cooling: 80°FDB / 67°FWB Indoor, 95°FDB Outdoor
 - Heating: 70°FDB Indoor, 47°FDB / 43°FWB Outdoor.
- Complies with AHRI 1230-2014 testing standards
- Operating Voltage Range 410V to 525V
- 4. To achieve cooling lower than 5°F a Low ambient hood must be installed. This is purchased as an accessory.
- A local 115V power outlet is available as an accessory to provide local power for maintenance.



DIMENSIONS		VRB120	VRB072						
Unit	Height	72	64-3/8						
Dimensions (in)	Width	68-1/2	52-3/4						
	Depth	32-5/8	31-1/2						
Main System Pipin	g (in)								
Liquid Pipe Connect	tion	3/4	5/8						
L.P. Gas Pipe Conn	ection	1-1/4	1-1/8						
Balancing Pipework between Modules (in)									
H.P. Gas Pipe Conn H.P. Gas Balance P		1-1/4	1						
Connection Oil Balance Pipe Co	nnection	3/4	3/4						
•		5/16	5/16						
Unit Net Weight (lb)		1093	765						








SUBMITTAL DATA - OUTDOOR UNIT VRB192L4M-3G VRB120L4M-3G + VRB072L4M-3G

DIMENSIONAL DRAWINGS - INCHES (MM)												
CORNER WEIGHTS									CENTER	R OF GR	AVITY	
Model No.	AA BB		В	CC		DD		EE		FF		
	lbs.	kg	lbs.	kg	lbs.	kg	lbs.	kg	in.	mm	in.	mm
VRB120L4	173	80	266	122	332	153	323	148	37-1/2	953	12	305

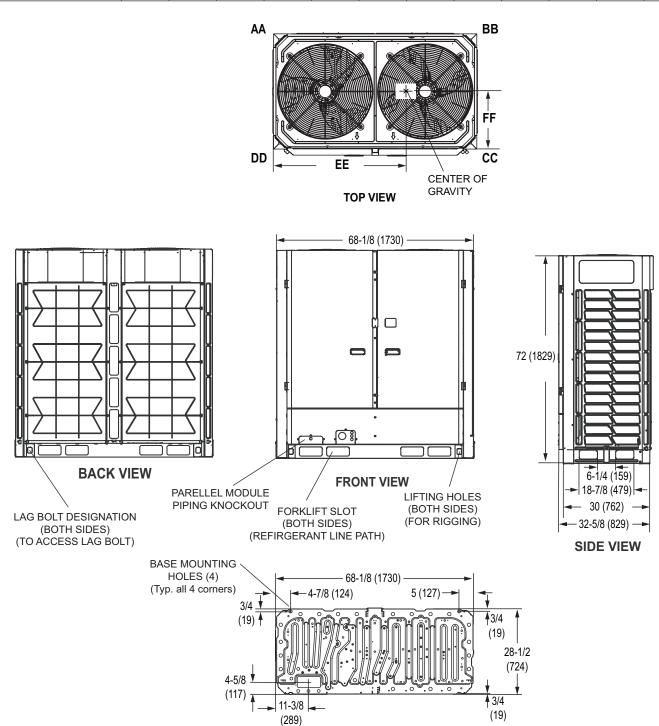

NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability.

Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury.

Installation and service must be performed by a qualified installer and servicing agency.

495896 (202402)

©2024 Lennox Industries Inc.

BASE PAN VIEW



BACK VIEW

LAG BOLT DESIGNATION

(BOTH SIDES)

PARELLEL MODULE

PIPING KNOCKOUT

SUBMITTAL DATA - OUTDOOR UNIT VRB192L4M-3G VRB120L4M-3G + VRB072L4M-3G

VRF Heat Recovery

6-3/8 (162)


18-3/4 (476)


29-7/8 (759)

31-1/2 (800)

SIDE VIEW

DIMENSIONAL DRAWIN	IGS - INC	CHES (M	M)									
CORNER WEIGHTS CENTER OF GRAVITY												
Model No.	Α	AA BB		CC		DD		EE		FF		
	lbs.	kg	lbs.	kg	lbs.	kg	lbs.	kg	in.	mm	in.	mm
VRB072L4	124	57	207	95	215	99	256	118	27-3/4	705	12-1/4	311

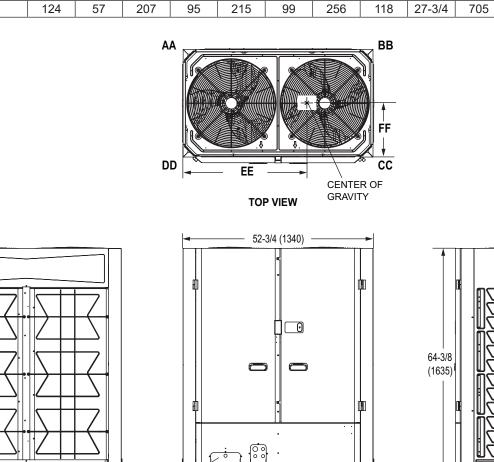

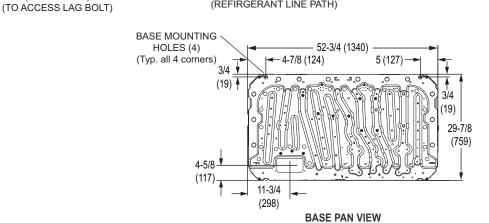

FORKLIFT SLOT

(BOTH SIDES)

(REFIRGERANT LINE PATH)

FRONT VIEW

LIFTING HOLES

(BOTH SIDES)

(FOR RIGGING)

NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury.

Installation and service must be performed by a qualified installer and servicing agency.

495896 (202402) Installation and service must be performed by a qualified installer and servicing agency. ©2024 Lennox Industries Inc.




SUBMITTAL DATA - OUTDOOR UNIT VRB192L4M-3G VRB120L4M-3G + VRB072L4M-3G

VRF Heat Recovery

MULTI-MODULE INFORMATION


Multi-Module Dimensions



NOTE - All the outdoor units manifolded together should be installed at the same elevation.

TOP VIEW

Multi-Module Power

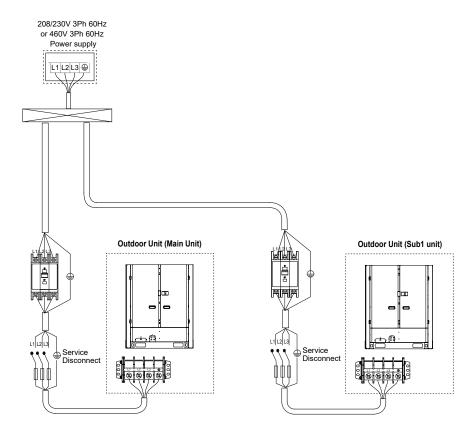

See page 1 for electrical data.

Total system MCA is calcuated by adding the MCA value of each module together to get the total system MCA.

Total system MOP is calcuated by adding the MOP value of each module together to get the total system MCA.