


LANDMARK®

- 1 Environ™ Coil System:** Uses up to 52% less refrigerant, is up to 59% lighter and has up to 20% fewer brazed joints than typical units (standard on B-Series 2- to 5-ton and all 6- to 25-ton G/E and E/E models; heat pump models use tube and fin coils).
- 2 Scroll Compressor:** Standard on all units for reliable long-term operation.
- 3 High-Pressure Switch:** Improves reliability by safeguarding compressor from extreme operating conditions.
- 4 Slide-Out Blower:** Reduces time needed to adjust fan speed, belt tensioning or blower cleaning.
- 5 Predefined Supply Fan Motor/Drive Combinations:** Make selecting components to meet static and airflow requirements quick and easy.
- 6 Easy-Access Gas Compartment:** Allows access to all gas components.
- 7 Corrosion-Resistant, Removable Drain Pan:** Provides application flexibility, durability and improved serviceability. Bottom drain capability also standard.
- 8 Independent Motor Mount:** Allows for easy and efficient service access without removing the top panel.
- 9 Isolated Compressor Compartment:** Allows performance check during normal compressor operation without disrupting airflow.

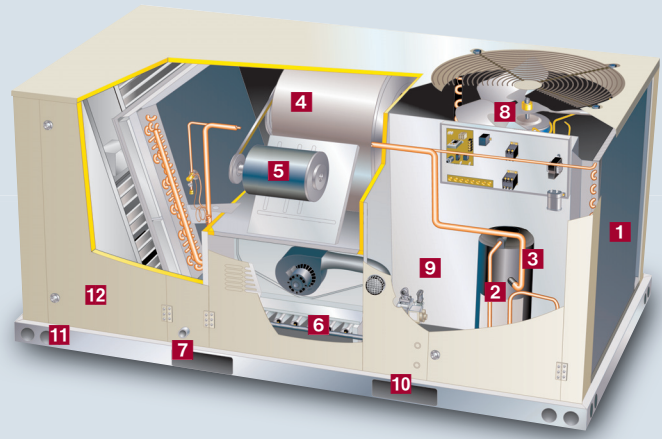

- 10 Fork Slots on Three Sides:** Easy to pick up and transport units from almost any angle.
- 11 Full-Perimeter Base Rail (with Rigging Holes):** Provides greater structural integrity, so the unit is easier to handle when rigging and transporting.
- 12 Hinged Access Panels:** Factory option provides quick access to components and protects panels and roof from damage during servicing.

Landmark high-efficiency rooftop unit performance specifications

	NOM. TON	MODEL	COOLING DATA		HEATING INPUT				PHYSICAL DATA		
			EER	IEER	LOW	STD.	MED.	HIGH	DIMENSIONS H X W X L [INCHES]	SHIP WT. [LBS.]	
GAS/ ELECTRIC UNITS	6	KGB072H4B / KGB074H4T	12.0	13.5/16.0	—	65	108	150	47 x 47 x 86	690	
	7.5	KGA092H4B/M	12.5	13.0/14.0	—	130	180	240	47 x 61 x 102	1,185	
	8.5	KGA102H4B/M	12.2	12.9/14.0	—	130	180	240	47 x 61 x 102	1,192	
	10	KGA120H4B/M	12.0	13.0/13.8	—	130	180	240	47 x 61 x 102	1,227	
	13	KGA156H4B/M	12.0	13.6/14.1	—	260	360	—	55 x 91 x 108	2,135	
	15	KGA180H4B/M	12.0	13.5/13.7	—	260	360	480	55 x 91 x 133	2,315	
	17.5	KGA210H4B/M	12.0	13.0/14.0	—	260	360	480	55 x 91 x 133	2,440	
	20	KGA240H4B/M	12.0	13.2/14.5	—	260	360	480	55 x 91 x 133	2,525	
	25	KGA300H4B/M	10.5	10.9/13.8	—	260	360	480	55 x 91 x 133	2,630	
					KW RANGE						
ELECTRIC/ ELECTRIC UNITS	6	KCB072H4B / KCB074H4T	12.0	13.5/16.0	—	65	108	150	47 x 47 x 86	661	
	7.5	KCA092H4B/M	12.7	13.0/14.0	7.5	15.0	22.5	30.0	45.0	47 x 61 x 102	1,137
	8.5	KCA102H4B/M	12.4	12.9/14.0	7.5	15.0	22.5	30.0	45.0	47 x 61 x 102	1,144
	10	KCA120H4B/M	12.2	13.2/14.0	15.0	22.5	30.0	45.0	60.0	47 x 61 x 102	1,179
	13	KCA156H4B/M	12.0	13.6/14.1	15.0	30.0	45.0	60.0	—	55 x 91 x 108	1,985
	15	KCA180H4B/M	12.0	13.5/13.7	15.0	30.0	45.0	60.0	—	55 x 91 x 133	2,165
	17.5	KCA210H4B/M	12.0	13.0/14.0	15.0	30.0	45.0	60.0	90.0	55 x 91 x 133	2,290
	20	KCA240H4B/M	12.0	13.2/14.5	15.0	30.0	45.0	60.0	90.0	55 x 91 x 133	2,375
	25	KCA300H4B/M	10.5	10.9/13.8	15.0	30.0	45.0	60.0	90.0	55 x 91 x 133	2,480

Landmark standard-efficiency rooftop unit performance specifications

		COOLING DATA		HEATING INPUT				PHYSICAL DATA				
NOM TON.	MODEL	EER	SEER OR IEER					DIMENSIONS H X W X L [INCHES]	SHIP WT. [LBS.]			
				LOW	STD.	MED.	HIGH					
GAS/ELECTRIC UNITS	2	KGB024S4D	12.7	14.0	—	65	—	—	39 x 47 x 86	586		
	2.5	KGB030S4D	11.5	14.0	—	65	—	—	39 x 47 x 86	610		
	3	KGA036S4B/D	10.7	13.0	—	65	108	—	39 x 47 x 86	594		
	3	KGB036S4B/D	12.5	14.0	—	65	108	—	39 x 47 x 86	609		
	4	KGA048S4B/D	11.0	13.0	—	65	108	150	39 x 47 x 86	631		
	4	KGB048S4B/D	11.5	14.0	—	65	108	150	39 x 47 x 86	625		
	5	KGA060S4B/D	11.2	13.0	—	65	108	150	39 x 47 x 86	661		
	5	KGB060S4B/D	11.8	14.0	—	65	108	150	47 x 47 x 86	703		
	6	KGA072S4B	11.0	12.3	—	65	108	150	47 x 47 x 86	780		
	6	KGB074S4T	11.2	15.0	—	65	108	150	47 x 47 x 86	690		
	7.5	KGA090S4B	11.0	11.2	—	—	108	150	47 x 47 x 99	843		
	7.5	KGA092S4B/M	11.0	11.8/13.0	—	130	180	240	47 x 61 x 102	1,003		
	8.5	KGA102S4B/M	11.0	11.8/13.0	—	130	180	240	47 x 61 x 102	1,023		
	10	KGA120S4B/M	11.0	11.8/13.0	—	130	180	240	47 x 61 x 102	1,071		
	12.5	KGA150S4B/M	11.0	11.4/12.0	—	130	180	240	47 x 61 x 102	1,157		
	15	KGA180S4B/M	10.8	11.0/12.6	—	260	360	480	55 x 92 x 108	1,990		
	17.5	KGA210S4B/M	10.8	12.0/13.1	—	260	360	480	55 x 92 x 108	2,135		
	20	KGA240S4B/M	10.8	11.0/13.0	—	260	360	480	55 x 92 x 133	2,380		
	25	KGA300S4B/M	10.0	10.0/12.0	—	260	360	480	55 x 92 x 133	2,380		
					KW RANGE*							
	ELECTRIC/ELECTRIC UNITS	2	KCB024S4D	12.7	14.0	5.0	7.5	10.0	—	—	39 x 47 x 86	550
		2.5	KCB030S4D	11.5	14.0	5.0	7.5	10.0	—	—	39 x 47 x 86	574
		3	KCA036S4B/D	10.7	13.0	7.5	15.0	—	—	—	39 x 47 x 86	558
		3	KCB036S4B/D	12.5	14.0	7.5	15.0	—	—	—	39 x 47 x 86	573
		4	KCA048S4B/D	11.0	13.0	7.5	15.0	—	—	—	39 x 47 x 86	595
4		KCB048S4B/D	11.5	14.0	7.5	15.0	—	—	—	39 x 47 x 86	589	
5		KCA060S4B/D	11.2	13.0	7.5	15.0	22.5	—	—	39 x 47 x 86	625	
5		KCB060S4B/D	11.8	14.0	7.5	15.0	22.5	—	—	47 x 47 x 86	667	
6		KCA072S4B	11.2	12.3	7.5	15.0	22.5	30.0	—	47 x 47 x 86	744	
6		KCB074S4T	11.2	15.0	7.5	15.0	22.5	30.0	—	47 x 47 x 86	661	
7.5		KCA090S4B	11.2	11.4	7.5	15.0	22.5	30.0	—	47 x 47 x 99	805	
7.5		KCA092S4B/M	11.2	12.0/13.2	7.5	15.0	22.5	30.0	45.0	47 x 61 x 102	955	
8.5		KCA102S4B/M	11.2	12.0/13.2	7.5	15.0	22.5	30.0	45.0	47 x 61 x 102	975	
10		KCA120S4B/M	11.2	12.0/13.2	15.0	22.5	30.0	45.0	60.0	47 x 61 x 102	1,023	
12.5		KCA150S4B/M	11.2	11.6/12.2	15.0	23.0	30.0	45.0	60.0	47 x 61 x 102	1,109	
15		KCA180S4B/M	11.0	11.2/12.8	15.0	30.0	45.0	60.0	—	55 x 92 x 108	1,840	
17.5		KCA210S4B/M	11.0	12.2/13.3	15.0	30.0	45.0	60.0	90.0	55 x 92 x 108	1,985	
20		KCA240S4B/M	11.0	11.2/13.2	15.0	30.0	45.0	60.0	90.0	55 x 92 x 133	2,230	
25		KCA300S4B/M	10.1	10.1/12.1	15.0	30.0	45.0	60.0	90.0	55 x 92 x 133	2,230	
				47 CAP.	HSPF/COP 47	17 CAP.	COP 17					
HEAT PUMPS		2	KHB024H4D	13.0	16.5	24,000	8.3/3.88	13,000	2.34		36-7/8 x 45 x 83-1/4	607
		2	KHB024S4D	11.7	14.0	25,000	8.0/3.76	14,400	2.3		39 x 47 x 86	614
		2.5	KHB030S4D	11.9	14.0	30,000	8.0/3.72	17,200	2.3		39 x 47 x 86	614
		3	KHB036H4D	12.7	16.0	35,600	8.7/3.9	19,200	2.4		36-7/8 x 45 x 83-1/4	607
		3	KHA036S4B/D	10.9	13.0	36,400	7.7/3.6	22,000	2.3		39 x 47 x 86	595
	3	KHB036S4B/D	11.5	14.0	36,600	8.0/3.64	21,000	2.3		39 x 47 x 86	696	
	4	KHB048H4D	12.8	16.0	46,500	8.9/3.9	26,000	2.52		46-7/8 x 45 x 83-1/4	682	
	4	KHA048S4B/D	10.7	13.0	48,000	7.7/3.5	29,500	2.4		39 x 47 x 86	617	
	4	KHB048S4B/D	11.4	14.0	49,500	8.0/3.72	30,000	2.4		47 x 47 x 86	696	
	5	KHB060H4D	12.5	16.0	60,000	8.9/3.76	34,000	2.46		46-7/8 x 45 x 96-1/4	810	
	5	KHA060S4B	10.9	13.0	60,500	7.7/3.6	36,000	2.4		47 x 47 x 86	727	
	5	KHB060S4B	11.9	14.0	58,000	8.0/3.72	34,600	2.4		47 x 47 x 86	727	
	6	KHA072S4B	11.0	12.1	70,000	3.3	40,000	2.25		47 x 47 x 99	810	
	6	KHB074S4T	11.0	14.0	70,000	3.3	46,000	2.3		47 x 47 x 99	810	
	7.5	KH/DB092H4B/M	12.1	12.9/14.2	86,000	3.6	5,000	2.40/2.36		46-7/8 x 60-1/8 x 101-1/4	1,158	
	7.5	KHA092S4B/M	11.0	12.2/12.5	89,000	3.3	53,000	2.25		47 x 61 x 102	1,137	
	8.5	KH/DB102H4B/M	12.0/11.8	12.5/14.3	100,000	3.6	55,000	2.40/2.37		46-7/8 x 60-1/8 x 101-1/4	1,160	
	8.5	KHA102S4B/M	11.0	12.2/12.5	100,000	3.3	55,000	2.25		47 x 61 x 102	1,169	
	10	KH/DB122H4M	12.3	14.8	116,000	3.6	70,000	2.4		46-7/8 x 60-1/8 x 101-1/4	1,301	
	10	KHA120S4B/M	11.0	11.3/12.5	116,000	3.3	72,000	2.25		47 x 61 x 102	1,235	
	12.5	KHA150S4B/M	10.6	10.7/12.0	138,000	3.2	82,000	2.05		47 x 61 x 124	1,435	
	15	KHA180S4B/M	10.6	12.2/13.2	178,000	3.2	104,000	2.05		55 x 92 x 130	2,150	
	20	KHA240S4B/M	10.6	11.2/13.0	220,000	3.2	128,000	2.05		55 x 92 x 130	2,350	

Direct-drive blower motors available for 2- to 5-ton models.

NOTE: Due to Lennox' ongoing commitment to quality, all specifications, ratings and dimensions are subject to change.