

SUBMITTAL DATA - INDOOR UNIT VOSB048H4-3P

VRF Heat Pump & Heat Recovery

Review

Construction

Job:	Engineer:
Location:	Architect:
Schedule No.:	Location:
System Designation:	Date:

For:

Reference

Outside Air Indoor Unit

FEATURES

- Pre Heat Function
- Auto Addressing
- Auto Restart

- LED Display · Sectional Filter
- Built-In Dry Contact Relays

Approval

- Refrigerant R-410A
- High-Efficiency DC Motor Five capacity sizes from 36,000 to 96,000 Btu/h

WARRANTY

• 10-year limited warranty.*See warranty for details.

SPECIFICATIONS		
PERFORMANCE		
Cooling Capacity ¹ (Btu/h)		48000
Heating Capacity ¹ (Btu/h)		40000
	Max	744
Airflow (CFM) at High Øæ) ÁSpeed⊞ €ÆÙÚÚÁ	Á Mid	647
	Min	550
External Static Pressure (in. w.g.)		0.2~0.8
Sound (dBA)	High	49.3
()	Medium	45.9
(ESP 50Pa)	Low	44.3

Electronic Expansion Valve

Brazed Connections

· Factory Secondary Drain Pan

ELECTRICAL DATA

Power Supply (Volts/Hertz/Phase)	208-230/60/1
Minimum Circuit Ampacity (MCA) (A)	3
Maximum Overcurrent Protection (MOP) (A)	15
Cooling Power Input ² (W)	75
Cooling Rated Current (A)	0.8
Heating Power Input ² (W)	62
Heating Rated Current (A)	0.7
Indoor Fan Motor Input (W)	71(H:50Pa)

DIMENSIONS

Unit Dimensions (in)Height Depth16-1/2 29-1/8Liquid Pipe Connection (in) (I.D)3/8Gas Pipe Connection (in) (I.D.)5/8Condensate Drain Connection - Drain Pump (in) (O.D.)1Condensate Drain Connection - Gravity (in) (O.D.)3/4 MPTNet Weight (lb)167Shipping Weight (lb)249		Width	51-1/4
Liquid Pipe Connection (in) (I.D)3/8Gas Pipe Connection (in) (I.D.)5/8Condensate Drain Connection - Drain Pump (in) (O.D.)1Condensate Drain Connection - Gravity (in) (O.D.)3/4 MPTNet Weight (lb)167	Unit Dimensions (in)	Height	16-1/2
Gas Pipe Connection (in) (I.D.)5/8Condensate Drain Connection - Drain Pump (in) (O.D.)1Condensate Drain Connection - Gravity (in) (O.D.)3/4 MPTNet Weight (lb)167		Depth	29-1/8
Condensate Drain Connection - Drain Pump (in) (O.D.) 1 Condensate Drain Connection - Gravity (in) (O.D.) 3/4 MPT Net Weight (lb) 167	Liquid Pipe Connection (in) (I.D)		3/8
(O.D.) 1 Condensate Drain Connection - Gravity (in) (O.D.) 3/4 MPT Net Weight (lb) 167	Gas Pipe Connection (in) (I.D.)		5/8
Net Weight (lb) 167			1
	Condensate Drain Connection - Gravity (in) (C).D.)	3/4 MPT
Shipping Weight (lb) 249	Net Weight (lb)		167
	Shipping Weight (lb)		249



OPTIONAL ACCESSORIES	
Non-Programmable Controller	V0STAT54P-3
Programmable Wired Controller	V0STAT51P-3
Infrared Wireless Controller	V0STAT52P-1
Occupancy Sensor	V0SNSR78P-3
Remote Sensor	V0SNSR00P-1
Hotel Keycard Interface	V0CTRL88P-1

NOTES

- Cooling and Heating capacity data is rated at the following 1. conditions: Cooling: 91°FDB / 82°FWB Heating: 32°FDB / 26°FWB.
- Power Input values are rated at high fan speed. 2.





NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency. 495741 (202206)




DIMENSIONAL DRAWINGS - INCHES (MM)

VHIB054H4

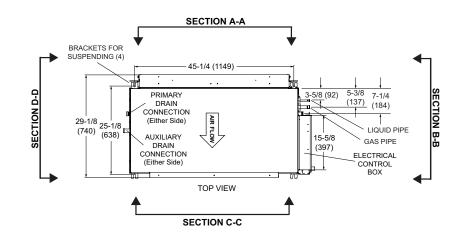

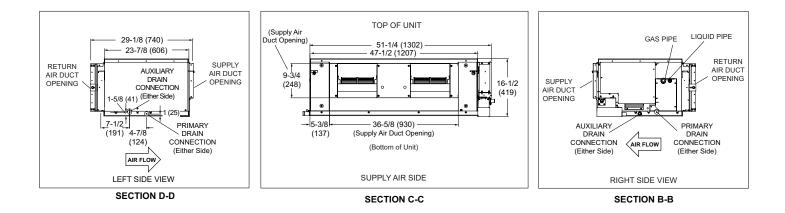



SECTION A-A

NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency. 495741 (202206)