

# SUBMITTAL DATA - INDOOR UNIT VSCA024H4-3P

		_	OUN	72-7117	•
VRF Hea	t Pump	&	Heat	Recov	ery

Job:	Engineer:		
Location:	Architect:		
Schedule No.:	Location:		
System Designation:	Date:		
	For: Reference Approval Review Construction		

Air Filter

· Flare Connections

## Floor Standing Indoor Unit (Cased)

#### FEATURES

- · Pre Heat Function · Electronic Expansion Valve
- High-Efficiency DC Motor · Auto Addressing
- Auto Restart · Receiver/Display Panel

- · Refrigerant R-410A
- Six Capacity Sizes from 7,500 to 24,000 Btu/h

#### WARRANTY

• 10-year limited warranty.\*See warranty for details.

PERFORMANCE					
Cooling Capacity <sup>1</sup> (Btu/h)					
Heating Capacity <sup>1</sup> (Btu/h)					
Low/Medium/High					
External Static Pressure (in. w.g.)					
m/High	38.7/40.8/43.1				
ELECTRICAL DATA					
Power Supply (Volts/Hertz/Phase)					
Minimum Circuit Ampacity (MCA) (A)					
Maximum Overcurrent Protection (MOP) (A)					
Cooling Power Input (W)					
Cooling Rated Current (A)					
Heating Power Input (W)					
Heating Rated Current (A)					
Indoor Fan Motor Input (W)					
DIMENSIONS					
Width	53-1/2				
Height	23-1/4				
Depth	7-7/8				
Liquid Pipe Connection (in) (I.D.)					
Gas Pipe Connection (in) (I.D.)					
Drain Connection (in) (O.D.)					
Net Weight (lb)					
Shipping Weight (lb)					
	width Height				



OPTIONAL ACCESSORIES	
Wired Controller	V0STAT55P-3
Support Feet	V8VSA001-3P
Hotel Keycard Interface	V0CTRL88P-1

#### **NOTES**

Cooling and Heating capacity data is rated at the following

Cooling: 80°FDB / 67°FWB Indoor, 95°FDB

Outdoor Heating: 70°FDB Indoor, 47°FDB / 43°FWB

Outdoor.








## SUBMITTAL DATA - INDOOR UNIT VSCA024H4-3P

**VRF Heat Pump & Heat Recovery** 

#### DIMENSIONAL DRAWINGS - INCHES (MM)

### VSCA024H4

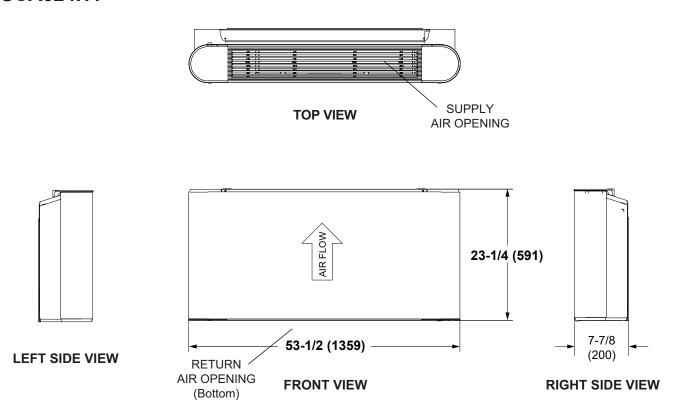

NOTE - Optional Feet (not shown) add 3-1/2 in. (89 mm) to the overall height

