

All covered components - Twelve year limited warranty.

Job:

Location:

Schedule No.:

System Designation:

FEATURES

Pre Heat Function

Product Warranty

• Auto Restart

Low Charge Detection

Built-In Condensate Pump

MMDB009S4-2P MULTI-ZONE MINI-SPLIT HEAT PUMP

SUBMITTAL DATA - DUCTED

Engineer:

Architect:

Date:

For: DReference DApproval DReview DConstruction

- Flare Connections
- Three Speed Fan
- Refrigerant R-410A
- Wired Controller included

Product registration requi	red.					
SPECIFICATIONS						
PERFORMANCE						
Cooling Capacity ¹ (Btu/h)		9,000				
Heating Capacity ¹ (Btu/h)		10,000				
Airflow (CFM)	High	340				
	270					
	Low	165				
External Static Pressure (in.	0 - 0.16					
Sound Pressure (dBA)	High	38				
	Medium	32				
	Low	25				
ELECTRICAL DATA						
Power Supply (V/Hz/Φ)		208-230/60/1				
Power Supply (V/Hz/Φ) Rated load amps (RLA)		208-230/60/1 0.9				
Rated load amps (RLA)		0.9				
Rated load amps (RLA) Power Output (W)	Height	0.9				
Rated load amps (RLA) Power Output (W) DIMENSIONS	Height Width	0.9 55				
Rated load amps (RLA) Power Output (W) DIMENSIONS	•	0.9 55 7-7/8				
Rated load amps (RLA) Power Output (W) DIMENSIONS	Width Depth	0.9 55 7-7/8 27-5/8				
Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in)	Width Depth	0.9 55 7-7/8 27-5/8 17-3/4				
Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in) Liquid Pipe Connection (in)	Width Depth	0.9 55 7-7/8 27-5/8 17-3/4 1/4				
Rated load amps (RLA)Power Output (W)DIMENSIONSUnit Dimensions (in)Liquid Pipe Connection (in)Gas Pipe Connection (in)	Width Depth	0.9 55 7-7/8 27-5/8 17-3/4 1/4 3/8				
Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in) Liquid Pipe Connection (in) Gas Pipe Connection (in) Condensate drain connection	Width Depth	0.9 55 7-7/8 27-5/8 17-3/4 1/4 3/8 1				



OPTIONAL ACCESSORIES

Non-Programmable Controller (M0STAT61Q-1): 1+

Programmable Controller (M0STAT64Q-1):

NOTES

1. Cooling and Heating capacity data is rated at the following conditions:

Cooling: 80°FDB / 67°FWB Indoor, 95°FDB Outdoor Heating: 70°FDB Indoor, 47°FDB / 43°FWB Outdoor








NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury Installation and service must be performed by a qualified installer and servicing agency.

495627 (202207) ©2022 Lennox Industries Inc.

SUBMITTAL DATA - DUCTED MMDB009S4-2P



MULTI-ZONE MINI-SPLIT HEAT PUMP

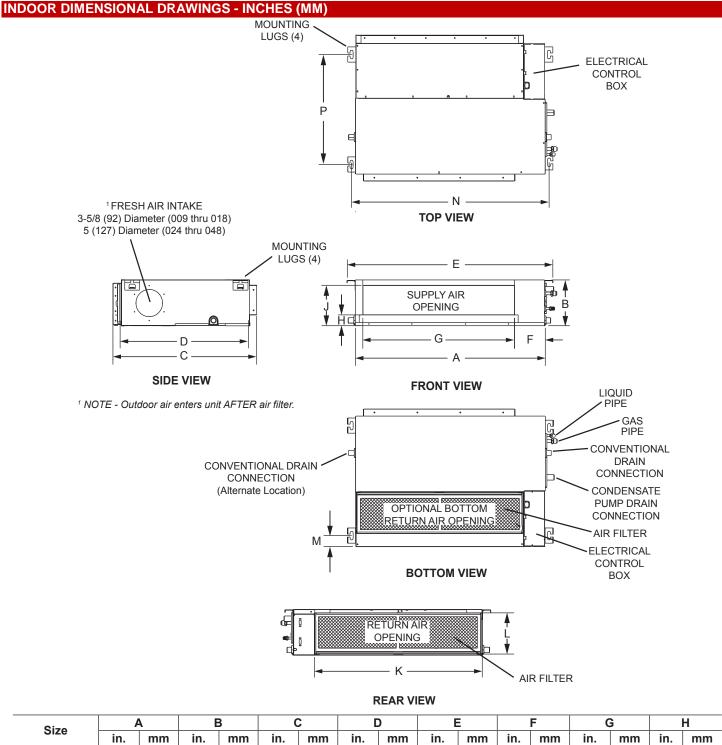

			1 1								1 /		-			
Size	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
009 thru 012	27-5/8	702	7-7/8	200	19-7/8	505	17-3/4	451	30-3/4	781	5-3/8	137	21-1/8	537	1-1/8	29
	J			K		L		Μ			N		Р			
	in.	m	m	in.	mm	in	. r	nm	in.	mm	า	in.	mm	in		mm
	6	15	52 2	23-5/8	600	7-3	/8 ′	187	2	51	2	9-1/8	740	14-1	1/8	359

NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury.