

Job: Location: Schedule No.: System Designation:

SUBMITTAL DATA - **DUCTED**MMDB018S4-2P

MULTI-ZONE MINI-SPLIT HEAT PUMP

Engineer:
Architect:
Date:
For: DReference DAnnroval DReview DConstruction

FEATURES

Auto Restart

- · Pre Heat Function
- Low Charge Detection
- Built-In Condensate Pump
- Flare Connections
- Refrigerant R-410A
- Three Speed Fan
- · Wired Controller included

Product Warranty

All covered components - Twelve year limited warranty. Product registration required.

Product registration required.											
SPECIFICATIONS											
PERFORMANCE											
Cooling Capacity ¹ (Btu/h)		18,000									
Heating Capacity ¹ (Btu/h)		18,000									
Airflow (CFM)	High	505									
	Medium	430									
	Low	350									
External Static Pressure (in.	0 - 0.40										
Sound Pressure (dBA)	High	39									
	Medium	37									
	Low	35									
ELECTRICAL DATA											
LLLO II (IO/ IL D/ (I/ (
Power Supply (V/Hz/Φ)		208-230/60/1									
		208-230/60/1									
Power Supply (V/Hz/Φ)											
Power Supply (V/Hz/Φ) Rated load amps (RLA)		1.2									
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W)	Height	1.2									
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS	Height Width	1.2 160									
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS	-	1.2 160 8-1/4									
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS	Width	1.2 160 8-1/4 34-5/8									
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in)	Width	1.2 160 8-1/4 34-5/8 23-5/8									
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in) Liquid Pipe Connection (in)	Width Depth	1.2 160 8-1/4 34-5/8 23-5/8 1/4									
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in) Liquid Pipe Connection (in) Gas Pipe Connection (in)	Width Depth	1.2 160 8-1/4 34-5/8 23-5/8 1/4 1/2									
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in) Liquid Pipe Connection (in) Gas Pipe Connection (in) Condensate drain connection	Width Depth	1.2 160 8-1/4 34-5/8 23-5/8 1/4 1/2									



OPTIONAL ACCESSORIES	
Non-Programmable Controller (M0STAT61Q-1):	1+
Programmable Controller (M0STAT64Q-1):	

NOTES

1. Cooling and Heating capacity data is rated at the following conditions:

Cooling: 80°FDB / 67°FWB Indoor, 95°FDB Outdoor Heating: 70°FDB Indoor, 47°FDB / 43°FWB Outdoor












SUBMITTAL DATA - DUCTED MMDB018S4-2P

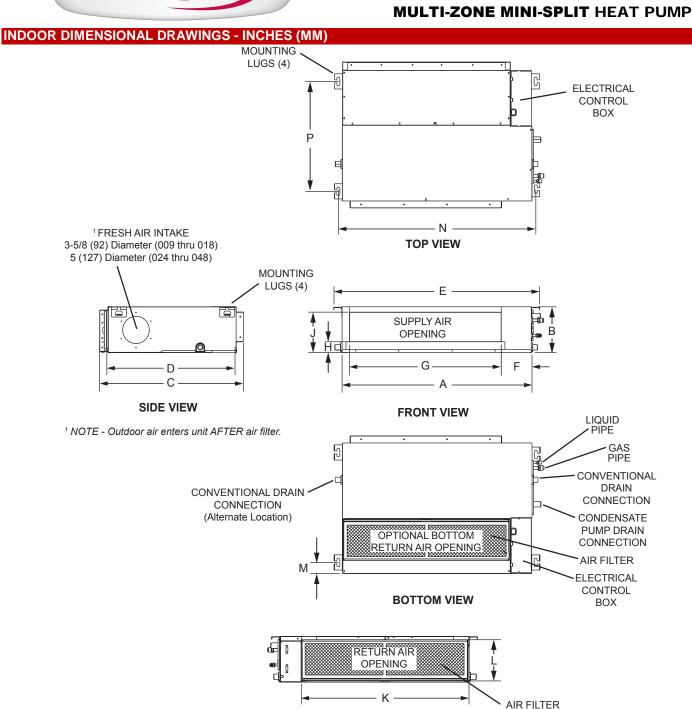

Size	Α			В		<u>п</u>)	E		F		G		Н	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
	34-5/8	879	8-1/4	210	26-1/2	673	23-5/8	600	37-7/8	962	5-1/2	140	27-3/4	705	2	51
018	J		K			L		M			N		Р		•	
	in.	m	m	in.	mm	in	. r	nm	in.	mm	1	in.	mm	in.		mm
	5-3/8	13	37 3	30-3/4	781	7-1	/2 /	191	1-5/8	41	3	6-1/4	921	20)	508

REAR VIEW