

SUBMITTAL DATA – WALL MOUNTED
MHB012S4S-1L - MWHB012S4-2L

SINGLE ZONE MINI-SPLIT HEAT PUMP

Job:	
Location:	
Schedule No.:	
System Designation:	

FEATURES

Outdoor Unit: MHB012S4S-1L

Engineer:

Architect:


Date:

For: □ Reference □ Approval □ Review □ Construction

Indoor Unit: MWHB012S4-2L



- DC Inverter Control
- Compressor Overcurrent Protection
- Defrost Control



- Three Speed Fan
- Flare Connections
- Multi-Refrigerant Outlet
- LED Readout
- Wireless Remote Included

PIPING

Line Set and Elevation Guidelines	
Maximum Line Set Length ft. (m)	82 (25)
Maximum Elevation - Outdoor Unit Below/Above Indoor Unit ft. (m)	33 (10)
Liquid Line Set Diameter (in.)	1/4
Gas Line Set Diameter (in.)	1/2
Pre-Charged (ft.)	25
Additional Charge Per Ft. (oz.)	0.16

PRODUCT WARRANTY

Compressor – Seven year limited warranty All other covered components - Five year limited warranty



OPTIONAL ACCESSORIES

Non-Programmable Controller (M0STAT61Q-1) Non-Programmable Controller (M0STAT120L-1) Programmable Controller (M0STAT120N-1) Hail Guard Set (M9GARD20Q-1/24M82)



NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings, and Dimensions are subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency. 496051 (202312) ©2023 Lennox Industries, Inc.

Intertek



SUBMITTAL DATA - WALL MOUNTED MHB012S4S-1L - MWHB012S4-2L

SINGLE ZONE MINI-SPLIT HEAT PUMP


OUTDOOR SPECIFICATIONS	
PERFORMANCE	
Cooling Capacity (Btu/h) ¹	12,000
EER2	10.3
SEER2	20.8
Heating Capacity (Btu/h) ¹	12,000
HSPF2	8.7
Outdoor Fan Total Air Volume (CFM)	1,235
Ambient Temperature Operating Range	
Cooling	5°F - 122°F
Heating	5°F - 86°F
ELECTRICAL DATA	
Power Supply (V/Hz/Φ)	115/60/1
Minimum Circuit Ampacity (A)	18.5
Maximum Overcurrent Protection (A)	25
Outdoor Fan Motor RLA (A)	0.4
No. of Compressors	1

GENERAL DATA		
Connection Ratio (%)		100%
Max. # of Indoor Units		1 unit
Sound Data (dBA)		53.5
Refrigerant type		R-410A
Factory refrigerant charge	11	bs. 13 oz.
DIMENSIONS		
Unit Dimensions (in)	Height	21-7/8
	Width	32-7/8
	Depth	11-1/4
Shipping Weight (lb)		68
Net Weight (lb)		63
NOTES		


1. Cooling and Heating Capacity data is rated at the following conditions:

Cooling: 80°FDB / 67°FWB Indoor, 95°FDB Outdoor Heating: 70°FDB Indoor, 47°FDB / 43°FWB Outdoor

OUTDOOR DIMENSIONAL DRAWINGS - INCHES (MM)

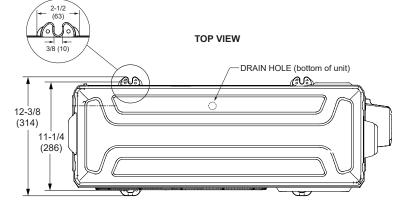

FRONT VIEW

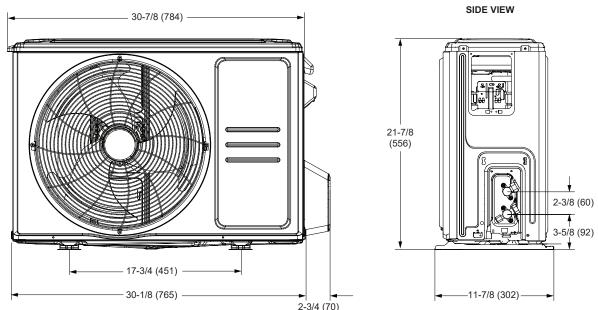

NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings, and Dimensions are subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency. 496051 (202312)



SUBMITTAL DATA - WALL-MOUNTED MHB012S4S-1L - MWHB012S4-2L


SINGLE ZONE MINI-SPLIT HEAT PUMP

INDOOR SPECIFICATIONS

PERFORMANCE		
Airflow (CFM)	High	300
	Medium	241
	Low	176
Sound Pressure (dBA)	High	41
	Medium	35
	Low	26
ELECTRICAL DATA		
Power Supply (V/Hz/Φ)		Supplied by ODU
Rated load amps (RLA)		10.13
Power Output (W)		20
INDOOR DIMENSIONAL D	RAWINGS	- INCHES (MM)

DIMENSIONS		
Unit Dimensions (in)	Height	11-5/8
	Width	31-3/4
	Depth	7-7/8
Unit Net/Shipping Weight (lb)		19/24
PIPING		
Liquid/Gas O.D. Flare (in.)		1/4,1/2
Drain Connection O.D. (in.)		1

MWHB012

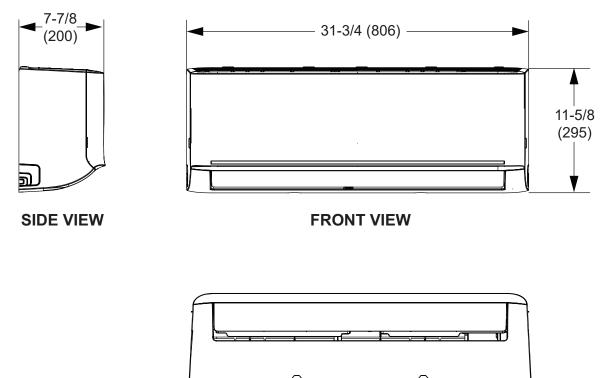

BOTTOM VIEW