

Job:	
Location:	
Schedule No.:	
System Designation:	

### FEATURES

### Outdoor Unit: MPC036S4S-1P

# SUBMITTAL DATA - CEILING/FLOOR MPC036S4S-1P - MCFB036S4-1P

## SINGLE ZONE MINI-SPLIT HEAT PUMP

Engineer:

Architect:

Date:

For: CReference Approval Review Construction

#### Indoor Unit: MCFB036S4-1P



- DC =nverter 7 ontrol
- Compressor Overcurrent Protection
- Base Dan < eater
- Defrost 7 ontrol



- Pre Heat Function
- Auto Restart
- Three Selectable Fan Speeds
- Flare Connections
- LED Readout/Infrared Receiver Panel
- Multi-Refrigerant Outlet
- Wireless Remote Included

#### PIPING

Line Set and Elevation Guidelines	
Maximum Line Set Length ft. (m)	213 ft. (65 m)
Maximum Elevation - Outdoor Unit Below/Above Indoor Unit ft. (m)	98 ft. (30 m)
Liquid Line Set Diameter (in.)	3/8
Gas Line Set Diameter (in.)	5/8
Pre-Charged (ft.)	25
Additional Charge of Refrigerant (oz/ft.)	0.32

### PRODUCT WARRANTY

Compressor – Twelve year limited warranty\* All other covered components - Twelve year limited warranty\* \*Product registration required





### OPTIONAL ACCESSORIES

Non-Programmable Controller (M0STAT61Q-1) Programmable Controller (M0STAT64Q-2) Hail Guard Set (M9GARD22Q-1)



NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings, and Dimensions are subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.



# SUBMITTAL DATA - CEILING/FLOOR MPC036S4S-1P - MCFB036S4-1P

## SINGLE ZONE MINI-SPLIT HEAT PUMP


OUTDOOR SPECIFICATIONS	
PERFORMANCE	
Cooling Capacity (Btu/h) <sup>1</sup>	36,000
EER2	8.5
SEER2	18.8
Heating Capacity (Btu/h) <sup>1</sup>	36,000
HSPF2	9.0
Outdoor Fan Total Air Volume (CFM)	2,120
Ambient Temperature Operating Range	
Cooling	-13°F - 122°F
Heating	-13°F - 86°F
ELECTRICAL DATA	
Power Supply (V/Hz/Φ)	208-230/60/1
Minimum Circuit Ampacity (A)	30
Maximum Overcurrent Protection (A)	45
No. of Compressors	1

GENERAL DATA		
Connection Ratio (%)		100%
Max. # of Indoor Units		1 unit
Sound Data (dBA) - Cooling/Heating		65/65
Refrigerant type		R-410A
Factory refrigerant charge		7 lbs. 1 oz.
DIMENSIONS		
Unit Dimensions (in)	Height	31-7/8
	Width	37-1/4
	Depth	15-7/8
Shipping Weight (lb)		166
Net Weight (lb)		155
NOTES		


1. Cooling and Heating Capacity data is rated at the following conditions:

Cooling: 80°FDB / 67°FWB Indoor, 95°FDB Outdoor Heating: 70°FDB Indoor, 47°FDB / 43°FWB Outdoor


### **OUTDOOR DIMENSIONAL DRAWINGS - INCHES (MM)**

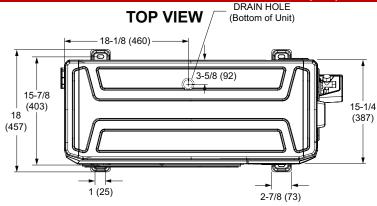

## **FRONT VIEW**



SIDE VIEW



NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings, and Dimensions are subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency. 495928 (202305)




# SUBMITTAL DATA - CEILING/FLOOR MPC036S4S-1P - MCFB036S4-1P SINGLE ZONE MINI-SPLIT HEAT PUMP

#### INDOOR SPECIFICATIONS

PERFORMANCE		
Airflow (CFM)	High	1035
	Medium	915
	Low	640
External Static Pressure (in. w.g	g.)	-
Sound Pressure (dBA)	High	52
	Medium	48
	Low	41
ELECTRICAL DATA		
Power Supply (V/Hz/Φ)		Supplied by ODU
Rated load amps (RLA)		1.5
Power Output (W)		115
INDOOR DIMENSIONAL DR	RAWINGS -	INCHES (MM)

DIMENSIONS		
Unit Dimensions (in)	Height	9-1/4
	Width	50-5/8
	Depth	26-5/8
Unit Net/Shipping Weight (lb)		69/82
PIPING		
Liquid/Gas O.D. Flare (in.)		3/8 , 5/8
Drain Connection O.D. (in.)		1

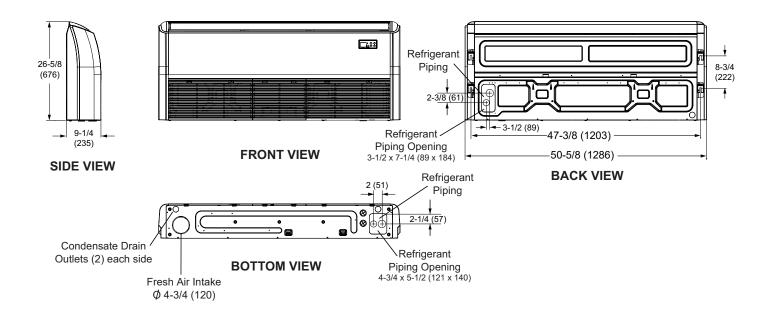

NOTE – Due to Lennox' ongoing commitment to quality, Spectrications, Katings, and Dimensions are subject to Grange without notice and analysis and service and alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency. 495928 (202305) ©2023 Lennox Industries, Inc. NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings, and Dimensions are subject to change without notice and without incurring liability. Improper installation, adjustment,