

# SUBMITTAL DATA - CEILING CASSETTE

M22A009S4-2P

## **MULTI-ZONE MINI-SPLIT HEAT PUMP**

Job:	Engineer:	
Location:	Architect:	
Schedule No.:	Date:	
System Designation:	For: □Reference □Approval □Review □Construction	

#### **FEATURES**

Auto Restart

- · Pre Heat Function
- 360° Airflow Panel
- · Built-In Condensate Pump
- Flare Connections
- Refrigerant R-410A
- LED Readout Panel
- · Wireless Remote Controller included

#### **Product Warranty**

All covered components - Twelve year limited warranty. Product registration required.

Product registration required.			
SPECIFICATIONS			
PERFORMANCE			
Cooling Capacity <sup>1</sup> (Btu/h)		9,000	
Heating Capacity <sup>1</sup> (Btu/h)		10,000	
Airflow (CFM)	High	380	
	Medium	320	
	Low	260	
External Static Pressure (in. w.g.)			
Sound Pressure (dBA)	High	41	
	Medium	39	
	Low	37	
ELECTRICAL DATA			
LLLO IT (IO) (L D) (I) (			
Power Supply (V/Hz/Φ)		208-230/60/1	
		208-230/60/1 0.9	
Power Supply (V/Hz/Φ)			
Power Supply (V/Hz/Φ) Rated load amps (RLA)		0.9	
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W)	Height	0.9	
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS	Height Width	0.9 46	
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS	-	0.9 46 10-3/8	
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS	Width	0.9 46 10-3/8 22-1/2	
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in)	Width	0.9 46 10-3/8 22-1/2 22-1/2	
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in)  Liquid Pipe Connection (in)	Width	0.9 46 10-3/8 22-1/2 22-1/2 1/4	
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in)  Liquid Pipe Connection (in) Gas Pipe Connection (in)	Width Depth	0.9 46 10-3/8 22-1/2 22-1/2 1/4 3/8	
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in)  Liquid Pipe Connection (in) Gas Pipe Connection (in) Condensate drain connection	Width Depth	0.9 46 10-3/8 22-1/2 22-1/2 1/4 3/8	



OPTIONAL ACCESSORIES	
Non-Programmable Controller (M0STAT61Q-1):	
Wireless Remote Controller (M0STAT60Q-1):	1+
Programmable Controller (M0STAT64Q-1):	

#### **NOTES**

- Cooling and Heating capacity data is rated at the following conditions:
   Cooling: 80°FDB / 67°FWB Indoor, 95°FDB Outdoor Heating: 70°FDB Indoor, 47°FDB / 43°FWB Outdoor
- 2. Cassette Panel (M0STAT62Q-1) ordered separately.













# SUBMITTAL DATA - CEILING CASSETTE M22A009S4-2P

**MULTI-ZONE MINI-SPLIT HEAT PUMP** 

## DIMENSIONAL DRAWINGS - INCHES (MM)

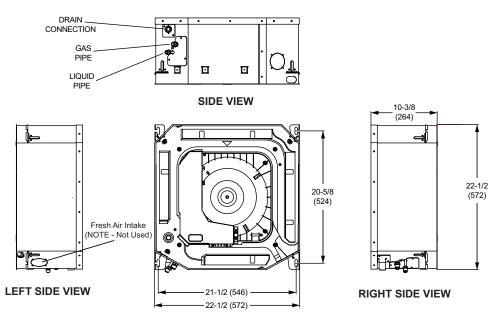

#### **BOTTOM VIEW (Body)**



# SIDE VIEW

