

Job:

Location:

Schedule No.:

System Designation:

FEATURES

- Pre Heat Function
- Auto Restart

Product Warranty

All covered components - Twelve year limited warranty. Product registration required.

• Flare Connections

• LED Readout Panel

SPECIFICATIO

SPECIFICATIONS		
PERFORMANCE		
Cooling Capacity ¹ (Btu/h)		23,000
Heating Capacity ¹ (Btu/h)		25,000
Airflow (CFM)	High	880
	Medium	770
	Low	650
External Static Pressure (in. w.g.) -		
Sound Pressure (dBA)	High	58.5
	Medium	55
	Low	52
ELECTRICAL DATA		
Power Supply (V/Hz/Φ)		208-230/60/1
Power Supply (V/Hz/Φ) Rated load amps (RLA)		208-230/60/1 1.5
Rated load amps (RLA)		1.5
Rated load amps (RLA) Power Output (W)	Height	1.5
Rated load amps (RLA) Power Output (W) DIMENSIONS	Height Width	1.5 55
Rated load amps (RLA) Power Output (W) DIMENSIONS	-	1.5 55 9-1/4
Rated load amps (RLA) Power Output (W) DIMENSIONS	Width	1.5 55 9-1/4 42-1/8
Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in)	Width	1.5 55 9-1/4 42-1/8 26-5/8
Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in) Liquid Pipe Connection (in)	Width	1.5 55 9-1/4 42-1/8 26-5/8 3/8
Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in) Liquid Pipe Connection (in) Gas Pipe Connection (in)	Width Depth	1.5 55 9-1/4 42-1/8 26-5/8 3/8 5/8

SUBMITTAL DATA - CEILING/FLOOR MCFA024S4-2P

MULTI-ZONE MINI-SPLIT HEAT PUMP

Engineer:

Architect:

Date:

For:
Reference
Approval
Review
Construction

- Refrigerant R-410A
- Wireless Remote Controller included



OPTIONAL ACCESSORIES

Non-Programmable Controller (M0STAT61Q-1):	
Wireless Remote Controller (M0STAT60Q-1):	1+
Programmable Controller (M0STAT64Q-1):	

NOTES

1. Cooling and Heating capacity data is rated at the following conditions:

Cooling: 80°FDB / 67°FWB Indoor, 95°FDB Outdoor Heating: 70°FDB Indoor, 47°FDB / 43°FWB Outdoor







NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.

495495 (201703)


SUBMITTAL DATA - CEILING/FLOOR




LENNOX

MULTI-ZONE MINI-SPLIT HEAT PUMP

DIMENSIONAL DRAWINGS - INCHES (MM)

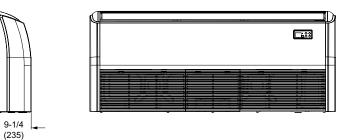





BACK VIEW

SIDE VIEW

26-5/8

(676)



BOTTOM VIEW